

RANGE COMPOSITION

A range of wall-mounted hoods used for snack applications and on the N700 and N900 Series cooking units. Their particular profile and the limited installation height makes them suitable for use in places with low ceilings.

The range consists of hoods with 8 different lengths (1200, 1600, 2000, 2400, 2800, 3200, 3600 and 4000 mm) and a depth of 900 mm.



MASTER - M line - 900 mm

430 AISI WALL TYPE HOODS **ZANUSSI** PROFESSIONAL



FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ Constructed entirely in 430 AISI stainless steel.
- ◆ Labyrinth filters in 430 AISI stainless steel easily removable for cleaning. Labyrinth filters guarantee constant filtration to avoid clogging and protect against fire.

- ◆ Back drain pipe with drain hole to transfer grease into a 304 AISI container.
- ◆ External panels with upturned edges to avoid injuries.
- ◆ Blind panels in 304 AISI stainless steel for a correct exhaustion.
- ◆ The outlet holes are sized in order to minimize drops in pressure.

- ◆ Pressure gauging for perfect calibration.
- ◆ Condensate collection tray in 304 AISI stainless steel.
- ◆ Eyebolts and screw anchors for ceiling installation.
- ◆ Prearranged for installation of lighting.

TECHNICAL DATA								
CHARACTERISTICS	MODELS							
	MP912BT 642286	MP916BT 642287	MP920BT 642288	MP924BT 642289	MP928BT 642001	MP932BT 642290	MP936BT 642291	MP940BT 642292
External dimensions - mm								
width	1200	1600	2000	2400	2800	3200	3600	4000
depth	900	900	900	900	900	900	900	900
height	500	500	500	500	500	500	500	500
Air Capacity - mc/h	1200	1600	2000	2400	2800	3200	3600	4000
Net weight - kg.	23	29	36	42	48	55	60	67
INCLUDED ACCESSORIES								
304 S/S BLIND PANEL 400X500H MM	1	1	1	1			1	1
430 S/S LABYRINTH FILTER H=500 MM	2	2	4	4	5	6	6	7

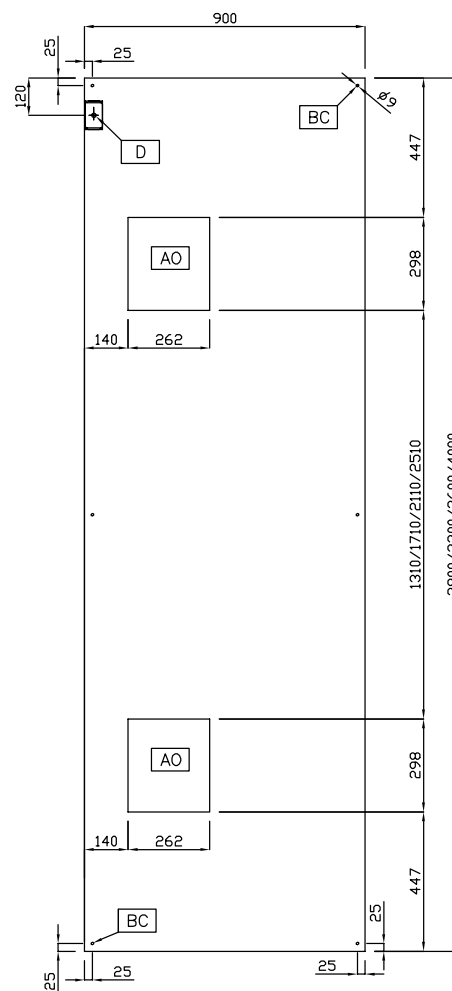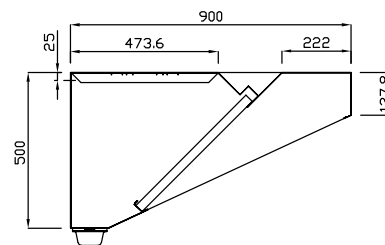

ZANUSSI
PROFESSIONAL

The Company reserves the right to alter technical specifications without prior notice.