

RANGE COMPOSITION

EVO900: a range designed to guarantee the highest level of performance, reliability, energy saving, safety standards and ergonomic operation. These concepts are reflected throughout the line in its modularity, construction and numerous configurations: countertop (on base or table), free-standing, on concrete or stainless steel plinth, bridged or cantilever. Thanks to its advanced technology and premium performance, EVO900 is a perfect solution for restaurants as well as large institutions needing high power and high productivity. The models detailed in this sheet are 18 litres electric fryers with internal heating elements.



EVO900

ELECTRIC FRYERS - 18 LT **ZANUSSI** PROFESSIONAL

FUNCTIONAL AND CONSTRUCTION FEATURES

- ◆ The electric fryer is ideal for kitchens needing a fast and easy to use appliance capable of cooking numerous portions time after time.
- ◆ Swivelling incoloy armoured heating elements in the cooking well can be easily tilted up to facilitate well cleaning operations.

- ◆ Worktop in 20/10 stainless steel. Front and side panels in stainless steel with Scotch Brite finish.
- ◆ Working temperature from 105°C to 185°C.
- ◆ All models have right-angled side edges to allow flush-fitting joints between units, eliminating gaps and possible dirt traps. Additional overheat safety thermostat.
- ◆ Oil drainage via a tap into a drainage container positioned under the well thus simplifying the consumed oil management and guaranteeing the operator safety.

- ◆ The units are supplied, as standard, with 2 half baskets for each well.
- ◆ The special design of the control knob system guarantees against water infiltration.
- ◆ Feet in stainless steel 50 mm adjustables in height. Door with handles in stainless steel.
- ◆ All models can be installed on cantilever system.
- ◆ Main connections can be via the base of the unit.
- ◆ All models provided with service duct to facilitate installation.


TECHNICAL DATA				
CHARACTERISTICS	MODELS			
	Z9FRED1HF0 392094	Z9FREH2HF0 392095	Z9FRED1HFN 392178	Z9FREH2HFN 392179
Power supply	Electric	Electric	Electric	Electric
External dimensions - inch				
width	15 3/4"	31 1/2"	15 3/4"	31 1/2"
External dimensions - mm				
depth	900	900	900	900
height	850	850	850	850
height adjustment	50	50	50	50
N° of wells	1	2	1	2
Usable well dimensions - mm				
width	340	340	340	340
depth	400	400	400	400
height	290	290	290	290
Maximum Well Capacity -lt	18, 20	18, 20	18, 20	18, 20
Power - kW				
installed-electric	16.5	33	16.5	33
Net weight - kg.	57	115	57	115
Supply voltage	400 V, 3N, 50/60	400 V, 3N, 50/60	230 V, 3, 50/60	230 V, 3, 50/60
INCLUDED ACCESSORIES				
2 HALF SIZE BASKETS FOR 18/23LT FRYERS	1	2	1	2
DOOR FOR OPEN BASE CUPBOARD-ZANUSSI	1	2	1	2

OPTIONAL ACCESSORIES				
ACCESSORIES	MODELS			
	Z9FRED1HF0 392094	Z9FREH2HF0 392095	Z9FRED1HFN 392178	Z9FREH2HFN 392179
1 FULL SIZE BASKET FOR 18/23LT FRYERS	927226	927226	927226	927226
2 HALF SIZE BASKETS FOR 18/23LT FRYERS	927223	927223	927223	927223
2 PANELS FOR SERVICE DUCT (BACK TO BACK)	206202	206202	206202	206202
2 PANELS FOR SERVICE DUCT (SINGLE INST.)	206181	206181	206181	206181
2 SIDE COVERING PANELS H=700-D=900-Z/OEM	206335	206335	206335	206335
2 SIDE KICKING STRIPS - 900 LINE	206180	206180	206180	206180
2 SIDE KICKING STRIPS-CONCRETE INST-900	206157	206157	206157	206157
4 FEET FOR CONCRETE INSTALLATION	206210	206210	206210	206210
4 WHEELS (2 WITH BRAKE)		206188		206188
CHIMNEY UPSTAND 400MM	206303		206303	
CHIMNEY UPSTAND 800MM		206304		206304
DOOR FOR OPEN BASE CUPBOARD-ZANUSSI	206342	206342	206342	206342
FLANGED FEET KIT	206136	206136	206136	206136
FRONT.KICK.STRIP F.CONCRETE INST.1000 MM	206150	206150	206150	206150
FRONT.KICK.STRIP F.CONCRETE INST.1200 MM	206151	206151	206151	206151
FRONT.KICK.STRIP F.CONCRETE INST.1600 MM	206152	206152	206152	206152
FRONT.KICK.STRIP F.CONCRETE INST.400 MM	206147		206147	
FRONT.KICK.STRIP F.CONCRETE INST.800 MM	206148	206148	206148	206148
FRONTAL HANDRAIL 1200 MM	206191	206191	206191	206191
FRONTAL HANDRAIL 1600 MM	206192	206192	206192	206192
FRONTAL HANDRAIL 400 MM	206166		206166	
FRONTAL HANDRAIL 800 MM	206167	206167	206167	206167
FRONTAL KICKING STRIP 1000 MM	206177	206177	206177	206177
FRONTAL KICKING STRIP 1200 MM	206178	206178	206178	206178
FRONTAL KICKING STRIP 1600 MM	206179	206179	206179	206179
FRONTAL KICKING STRIP 400 MM	206175		206175	
FRONTAL KICKING STRIP 800 MM	206176	206176	206176	206176
JUNCTION SEALING KIT	206086	206086	206086	206086
LARGE HANDRAIL(PORIONING SHELF)400 MM	206185	206185	206185	206185
LARGE HANDRAIL(PORIONING SHELF)800 MM	206186	206186	206186	206186
SIDE HANDRAIL-RIGHT/LEFT HAND-900 LINE	206165	206165	206165	206165
UNCLOGGING ROD F.23LT FRYER DRAIN.PIPE	927227	927227	927227	927227
WATER COLUMN WITH SWIVEL ARM	206289	206289	206289	206289



www.zanussiprofessional.com


392094, 392179, 392178

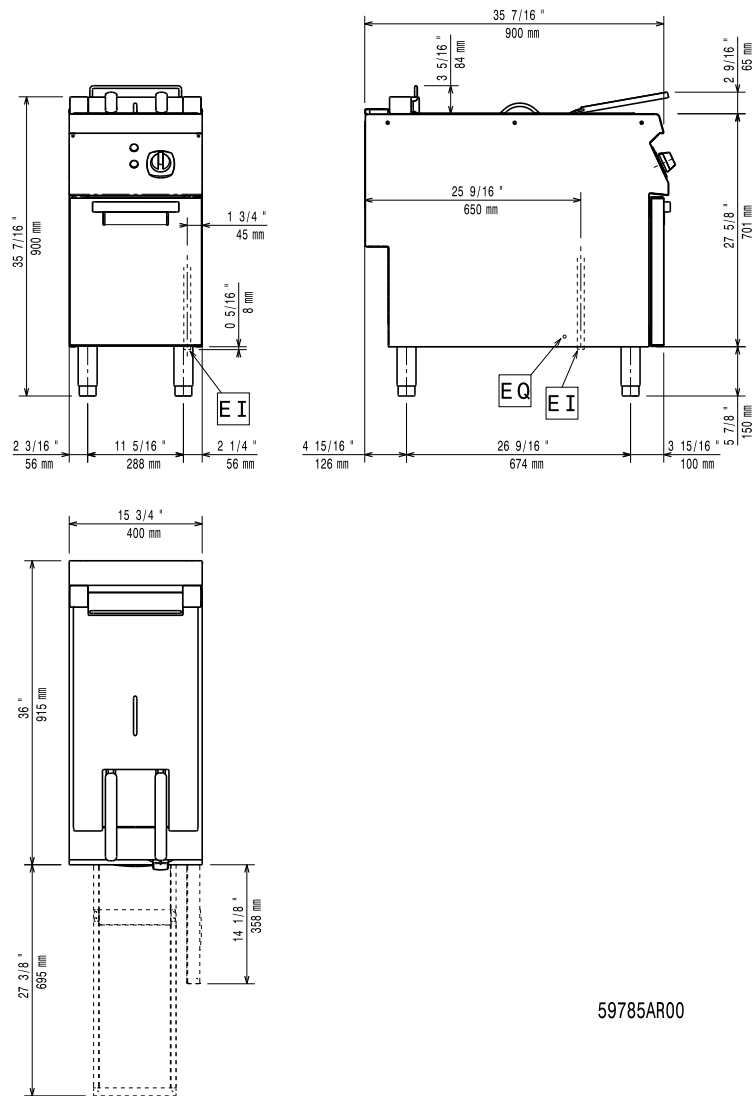

LEGEND

	Z9FRED1HF0 392094	Z9FRED1HFN 392178	Z9FRED2HFN 392179
EI - Electrical connection	400 V, 3N, 50/60	230 V, 3, 50/60	230 V, 3, 50/60

392095

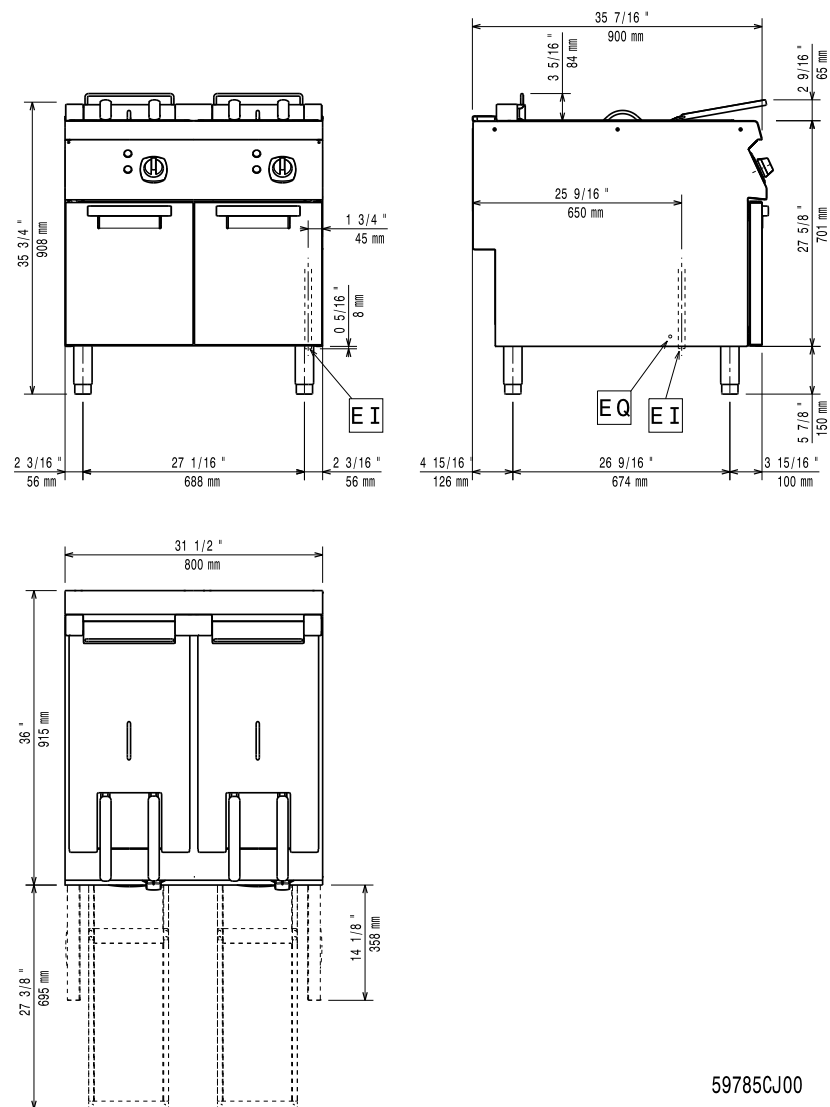

59785CJ00

LEGEND

EI - Electrical connection

Z9FREH2HF0
392095

400 V, 3N, 50/60

ZANUSSI
PROFESSIONAL

www.zanussiprofessional.com