

## STACKING GASTRONORM SLIDE BAR TROLLEYS



### GENERALS CHARACTERISTICS

Made of food quality stainless steel with a chromium content more than 17,5%.

### TUBE STRUCTURE:

- Uprights 25 x 25 mm section stainless steel tube, thickness 12/10 mm.
- Diagonal spacers, section 25 x 25 mm.

### SLIDE BARS:

- Bright stainless steel sheet thickness 12/10 mm.
- Continuous argon welds with no added metal.
- L-shaped with runner stops at each end.

### WHEELS:

- 4 swivel wheels Ø125 mm, of which 2 with brakes, non marking tyre.
- Annular wheel guards.

### END OF SERVICE LIFE:



- WEEE recycling channel - Syneg.
- Environmental specifications sheet available on request.

### MADE TO REQUEST:


- Trolley with closing bar for transport in a vehicle.

Maximum load: 20 kg per level, maximum 200 kg.

| Description     | levels | L<br>(mm) | w<br>(mm) | H<br>(mm) | d<br>(mm) | A<br>(mm) | B<br>(mm) | weight<br>(kg) | References     |                       |                       |
|-----------------|--------|-----------|-----------|-----------|-----------|-----------|-----------|----------------|----------------|-----------------------|-----------------------|
|                 |        |           |           |           |           |           |           |                | polyamid cover | verticale secure bars | stainless steel cover |
| Stackable GN1/1 | 20     | 653       | 454       | 1785      | 77        | 332       | 304       | 20             | 804 229        | 844 229               | 834 229               |
| Stackable GN2/1 | 20     | 773       | 654       | 1785      | 77        | 532       | 504       | 26             | 804 259        | 844 259               | 834 259               |

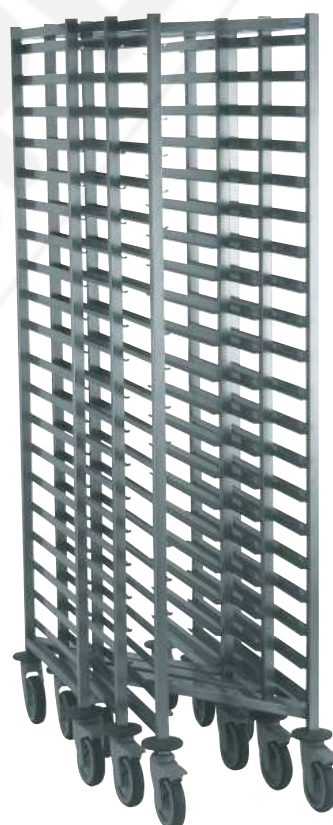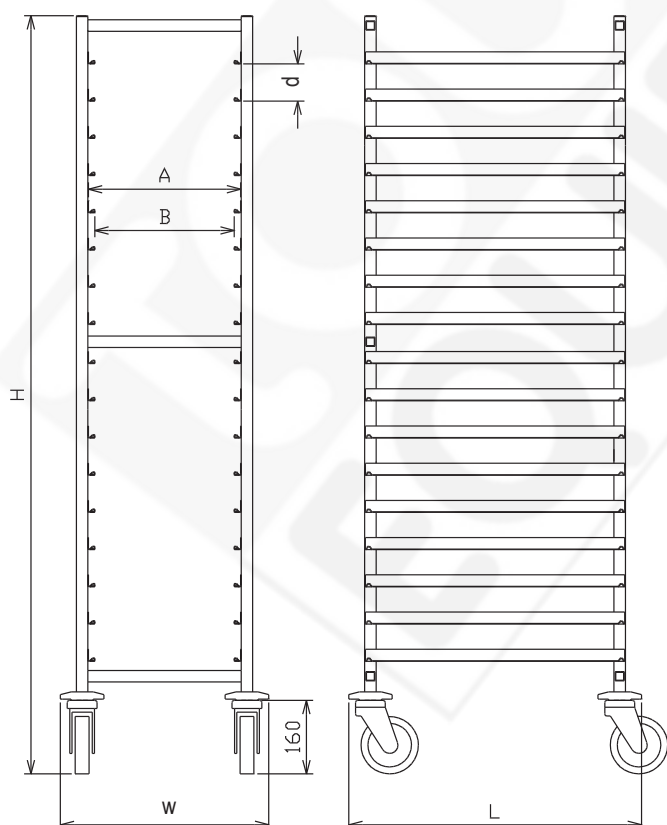

stacking method  
(seen from above)



verticale secure bars

